

BrightEye 92-M

HD Downconverter

BrightEye 92-M will downconvert any type of HD signal and provides both an SD SDI output and an analog composite output that are suitable for broadcast or monitoring. A special Mirror Output Mode can be enabled, causing the output image to be flipped left to right for use with on-camera talent. The built-in Frame Synchronizer allows you to feed asynchronous signals to the BrightEye 92-M. An external reference input allows genlock to a house reference.

All vertical interval data and closed captioning is faithfully passed. Sixteen channels of embedded audio are supported. If the incoming video has embedded audio, the audio will be safely bypassed around the video processing and lipsync will be preserved.

Audio monitoring is easy with BrightEye 92-M's convenient 3.5 mm mini jack. Just select the audio channels you want to monitor from the front panel and plug in a headset.

The HDMI connector on the rear of the unit provides a future proof monitoring interface. Plug it into most LCD monitors for confidence monitoring of your feed.

Input selection, gain control, and test pattern controls are provided through the front panel interface. Audio presence LEDs indicate which channels are detected. Controls for crop, letterbox and pillarbox are accessed from the front panel or BrightEye Mac or PC software.

► Specifications

Serial Digital Input


Number	One
Signal Type	1.485 Gb/s HD Serial Digital [SMPTE 274M, 292M or 296M]
Impedance	75 Ω
Return Loss	>15dB
Max Cable Length	100 meters for 1.485 Gb/s

Reference Input

Number	One
Type	1 V p-p Composite Video PAL or NTSC or Tri-Level Sync
Impedance	75 Ω
Return Loss	>40 dB

Analog Video Output

Number	One
Type	Composite PAL or NTSC
Return Loss	>40 dB
Output	DC < 100 mV

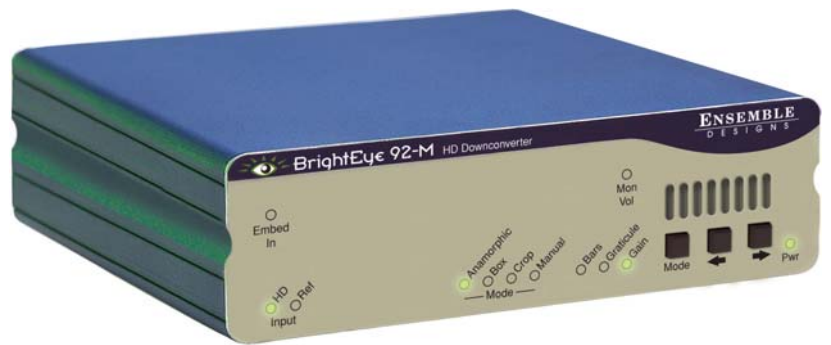

- Downconversion for monitoring or broadcast
- SD Digital and Analog Composite Video Outputs
- Analog Audio Monitor Output
- Mirror Output Mode for On-Camera Talent
- HDMI Output for Monitoring
- Frame Sync
- 12 and 16 bit processing
- Passes Embedded Audio

Serial Digital Output

Number	Two
Type	SD Serial Digital 270 Mb/s SMPTE 259M-C
Processing	12 and 16 bit
Impedance	75 Ω
Return Loss	>15 dB
Max Cable Length	300 Meters
HD Standards Supported	1080i [SMPTE 274M -4,5,6] 50, 59.94 or 60 Hz 720p [SMPTE 296M -1,2,3] 50, 59.94 or 60 Hz 1080p [SMPTE 274M -9,10,11] 23.98, 24, 25 Hz 1080sF [RP211 -14,15,16] 23.98, 24, 25 Hz

Monitor Output

Number	One
Connectorization	HDMI
Type	Follows SDI out

Audio Monitoring Output

Number	One [select from eight channels]
Connectorization	3.5 mm stereo mini jack

General Specifications

Size	5.625" W x 1.7" H x 5.5" D [143 mm x 40 mm x 140 mm] including connectors
Power	12 volts, 7 watts [100-230 VAC modular power supply not included]
Temperature Range	0 to 40° C ambient
Relative Humidity	0 to 95%, non-condensing